A2 PROSOIL	BOREHOLE NO: BH-1	
	LOCATION : Rajbari Sadar, Rajbari.	
PROJECT : Telecommunication Tower.	DEPTH OF BORING : 21.0m	R. L.: 1.52m below from Road Level.
CLIENT : Orascom Telecom Bangladesh Limited.	DATE OF BORING : 28-07-2008.	G. W. T : 0.30m below from E. G. L.

THICKNESS	SOIL STRATA	BORELOG	UNDISTURBED SAMPLE	DISTURBED SAMPLE	DEPTH (m) SPT VALUES (BLOWS / 300mm)	Grain Size Distribution, % Clay %, Silt %, Sand %	Max^{m} Penetration
3.0m	Very pale brown 10YR (8/4), loose, cohesionless silt, SM.			D-1 to D-3	4, 5, 3		
2.0m	Gray 10YR (5/1), loose, cohesionless silt, SM.			D-4 to D-5	2, 4		
4.5m	Gray 10YR (5/1), loose, cohesionless silt, SM.			D-6 to D-8	6, 6, 7		
3.0m	Black 10YR (2/1), Organic soil.			D-9 to D-10	4, 4		
4.5m	Light gray 10YR (7/2), loose to medium dense, cohesionless silt, SM.			D-11 to D-13	5, 5, 8		
3.45m	Very pale brown 10YR (8/4), medium plastic, stiff to very stiff, silty Clay, CL.			D-14 to D-16	14, 16, 18		

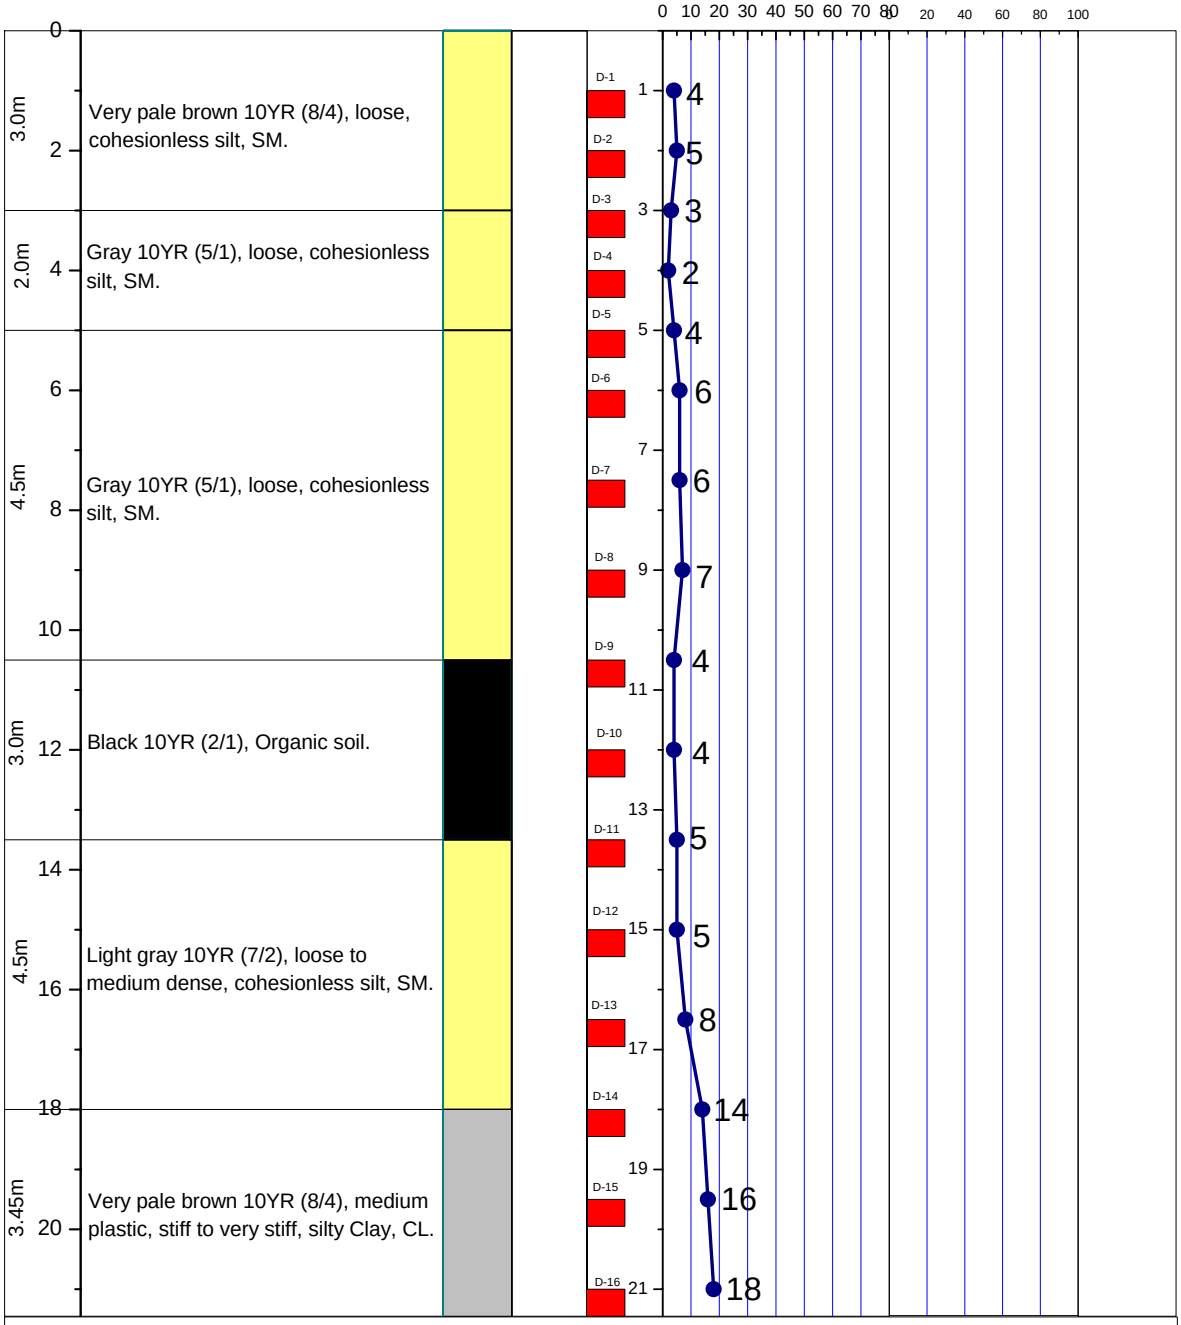

LEGEND FOR BORELOG AND GRAIN SIZE DISTRIBUTION

PLASTIC SILTY CLAY

LOW PLASTIC CLAYEY SILT

NON PLASTIC SILT

SAND

ORGANIC

UNDISTURBED SAMPLE

DISTURBED SAMPLE

SHALE

N- BLOWS DELIVERED PER FOOT BY A 140 LB HAMMER FALLING 30 INCHES

MAX^{m} PENETRATION= 50 BLOWS

AFTER 50 BLOWS PENETRATION DEPTH WERE MEASURED