A2	PROSOIL	BOREHOLE NO: BH-1	
		LOCATION: Gosh Kamta_Noakhali/Chhangram, Gosh Kamta, Sonaimuri, Noakhali.	
PROJECT : Telecommunication Tower.		DEPTH OF BORING: 21.0m	R. L.: 1.07m below from Road Level.
CLIENT : AXIATA (Bangladesh) Ltd.		DATE OF BORING: 06-01-2013.	G. W. T : 0.12m above from E. G. L.

THICKNESS	SOIL STRATA	BORELOG	UNDISTURBED SAMPLE	DISTURBED SAMPLE	DEPTH (m) SPT VALUES (BLOWS / 300mm)	Grain Size Distribution, % Clay %, Silt %, Sand %	Max^{m} Penetration
2.0m	Very pale Brown 10YR (7/3), medium plasticity, medium stiff, silty Clay, CL.		UD-1	D-1	6		
1.0m	Very pale Brown 10YR (8/3), loose, Silt, ML.			D-2	6		
1.0m	Very pale Brown 10YR (7/3), medium plasticity, soft to medium stiff, silty Clay, CL.		UD-3	D-3	5		
				D-4	7		
				D-5	9		
				D-6	8		
				D-7	22		
				D-8	16		
				D-9	13		
14.0m	Gray 10YR (6/1), medium dense to dense, fine Sand, SM.			D-10	14		
				D-11	15		
				D-12	14		
				D-13	15		
				D-14	10		
				D-15	7		
3.0m	Gray 10YR (6/1), medium plasticity, medium stiff to stiff, silty Clay, CL.			D-16	8		
0.45m	Gray 10YR (6/1), medium dense, Silt, ML.			D-17	15		

LEGEND FOR BORELOG AND GRAIN SIZE DISTRIBUTION (BASED ON 'ASTM CLASSIFICATION D-2487')

PLASTIC CLAY | SAND | SILT | SHALE

PEAT/HIGHLY ORGANIC SOIL | MICACEOUS FINE SAND/SILT | UNDISTURBED SAMPLE | DISTURBED SAMPLE

N- BLOWS DELIVERED PER FOOT BY A 140 LB HAMMER FALLING 30 INCHES

MAX^{m} PENETRATION= 50 BLOWS

AFTER 50 BLOWS PENETRATION DEPTH WERE MEASURED

A2	PROSOIL	BOREHOLE NO: BH-2	
		LOCATION: Gosh Kamta_Noakhali/Chhangram, Gosh Kamta, Sonaimuri, Noakhali.	
PROJECT : Telecommunication Tower.		DEPTH OF BORING: 21.0m	R. L.: 1.07m below from Road Level.
CLIENT : AXIATA (Bangladesh) Ltd.		DATE OF BORING: 07-01-2013.	G. W. T : 0.12m above from E. G. L.

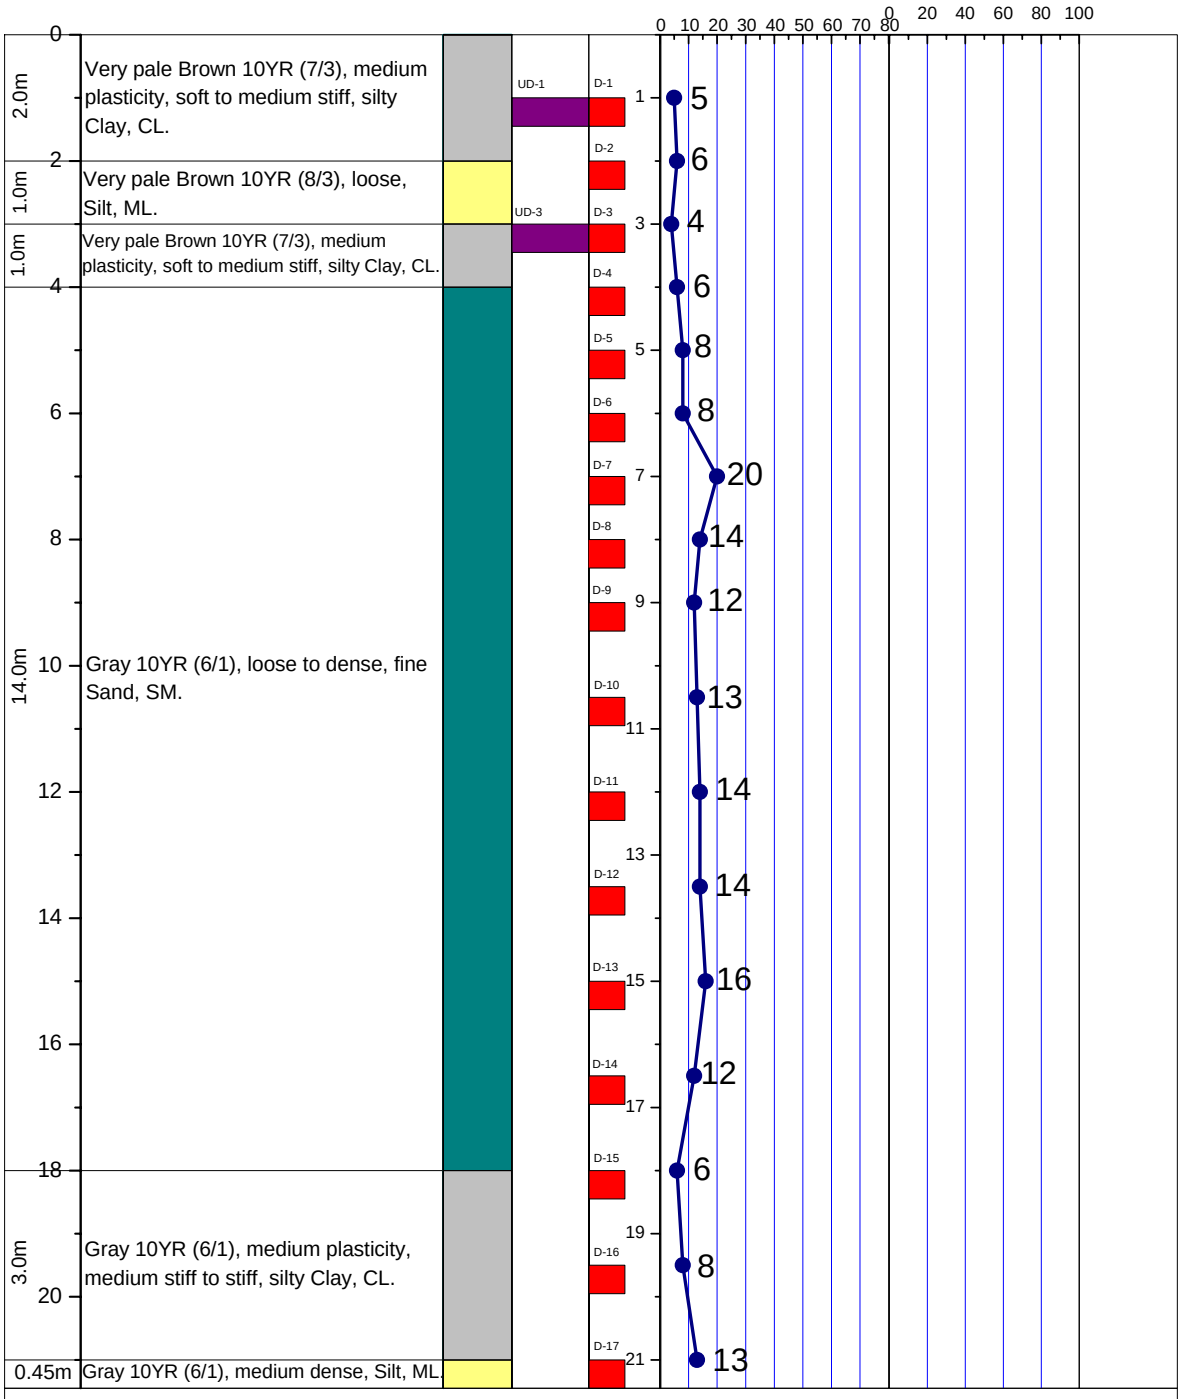

LEGEND FOR BORELOG AND GRAIN SIZE DISTRIBUTION (BASED ON 'ASTM CLASSIFICATION D-2487')

PLASTIC CLAY	SAND	SILT	SHALE
PEAT/HIGHLY ORGANIC SOIL	MICACEOUS FINE SAND/SILT	UNDISTURBED SAMPLE	DISTURBED SAMPLE

N- BLOWS DELIVERED PER FOOT BY A 140 LB HAMMER FALLING 30 INCHES

MAX^{m} PENETRATION= 50 BLOWS

AFTER 50 BLOWS PENETRATION DEPTH WERE MEASURED

A2	PROSOIL	BOREHOLE NO: BH-3	
		LOCATION: Gosh Kamta_Noakhali/Chhangram, Gosh Kamta, Sonaimuri, Noakhali.	
PROJECT : Telecommunication Tower.		DEPTH OF BORING: 21.0m	R. L.: 1.07m below from Road Level.
CLIENT : AXIATA (Bangladesh) Ltd.		DATE OF BORING: 07-01-2013.	G. W. T : 0.12m above from E. G. L.

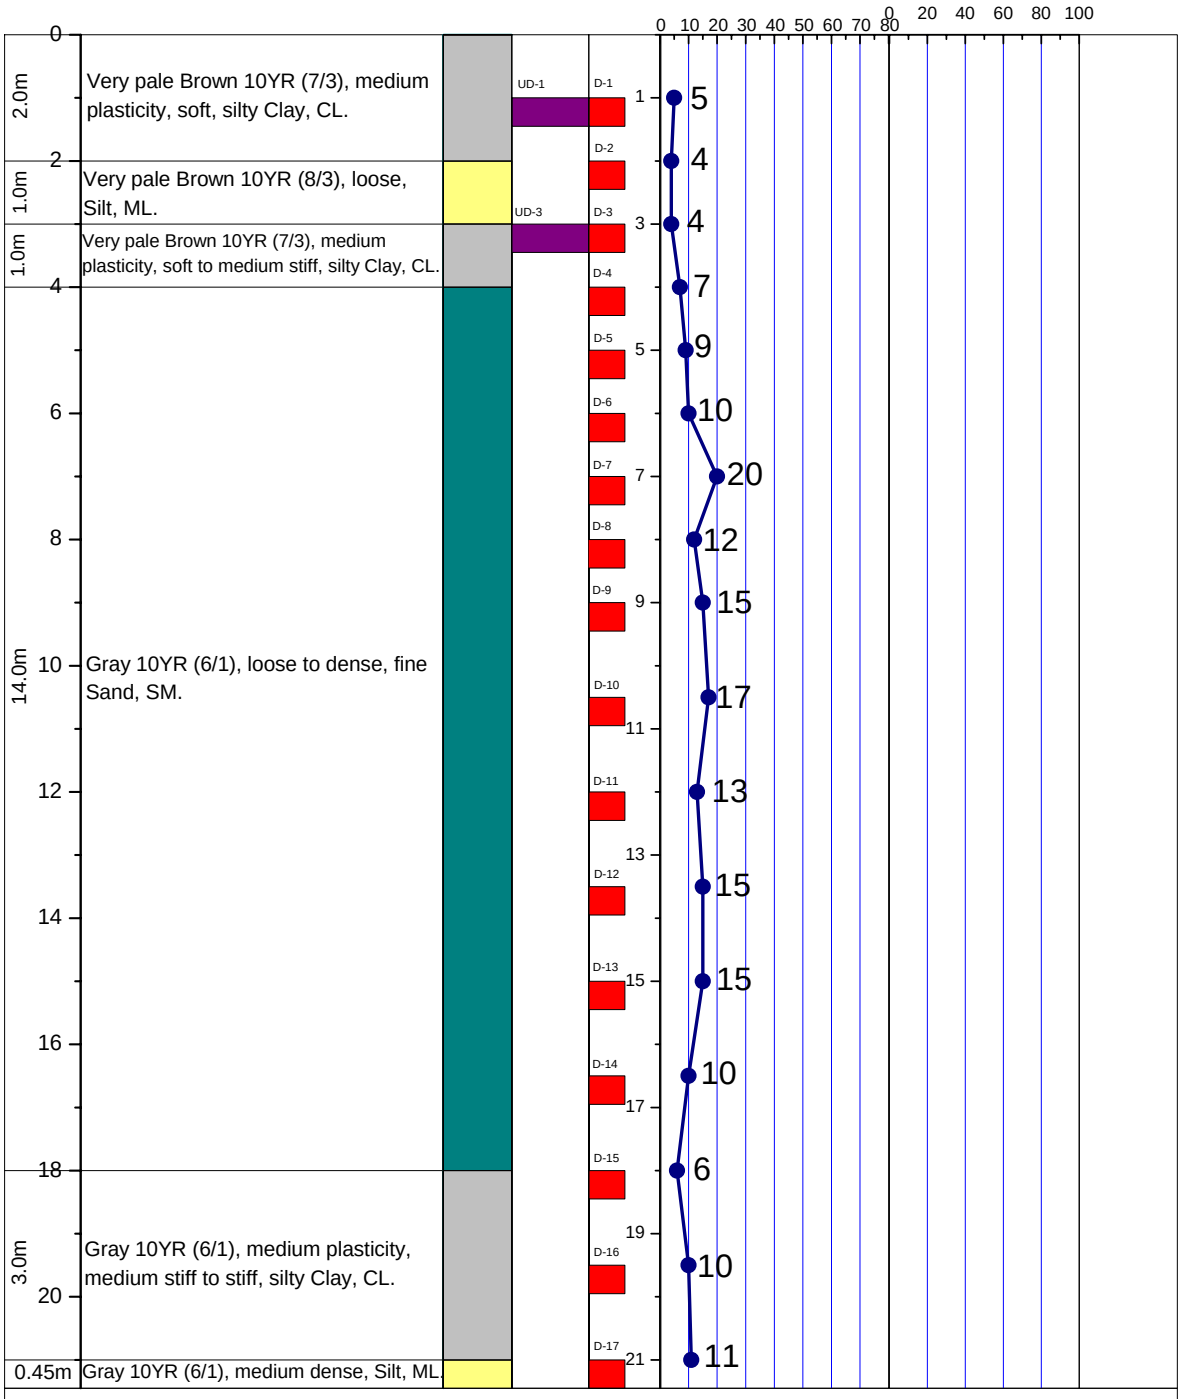

LEGEND FOR BORELOG AND GRAIN SIZE DISTRIBUTION (BASED ON 'ASTM CLASSIFICATION D-2487')

PLASTIC CLAY | SAND | SILT | SHALE

PEAT/HIGHLY ORGANIC SOIL | MICACEOUS FINE SAND/SILT | UNDISTURBED SAMPLE | DISTURBED SAMPLE

N- BLOWS DELIVERED PER FOOT BY A 140 LB HAMMER FALLING 30 INCHES

MAX^{m} PENETRATION= 50 BLOWS

AFTER 50 BLOWS PENETRATION DEPTH WERE MEASURED