A2 PROSOIL	BOREHOLE NO: BH-1	
	LOCATION : Rajarkul, Ramu, Cox's Bazar	
PROJECT : Telecommunication Tower.	DEPTH OF BORING : 21.0m	R. L.: 0.76m below from Road Level.
CLIENT : TM International, Bangladesh Ltd.	DATE OF BORING : 10-01-2009	G. W. T : 0.91m below from E. G. L.

THICKNESS	SOIL STRATA	BORELOG	UNDISTURBED SAMPLE	DISTURBED SAMPLE	DEPTH (m) SPT VALUES (BLOWS / 300mm)	Grain Size Distribution, % Clay %, Silt %, Sand %	Max^{m} Penetration
3.0m	Very pale brown 10YR (8/2), medium dense to dense, fine sand, SM.			D-1 to D-3	7, 17, 6		
1.0m	Light gray 10YR (7/1), medium plastic, medium stiff, silty Clay, CL.		UD-3	D-3	6		
1.0m	Gray 10YR (6/1), medium dense, fine sand, SM.			D-4 to D-5	8, 9		
1.0m	Light brownish gray 10YR (6/2), mediur dense, cohesionless silt, SM.			D-6	18		
15.45m	Gray 10YR (6/1), very dense, fine sand, SM.			D-7 to D-17	14, 22, 22, 27, 33, 37, 39, 42, 45, 47, 49		

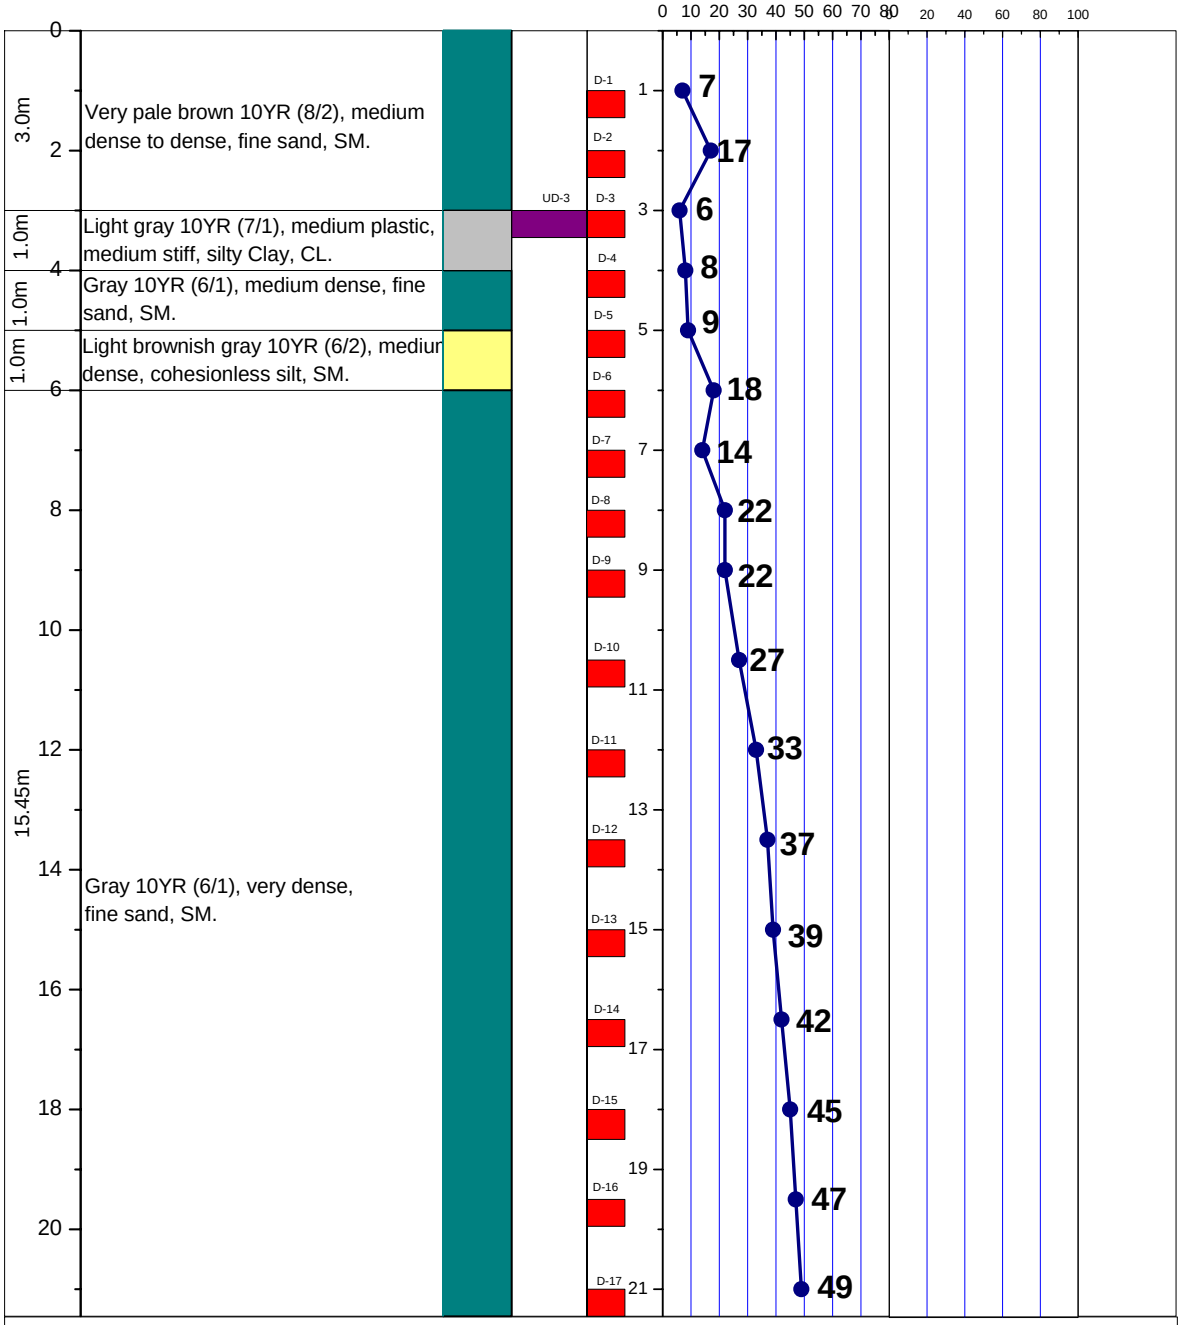

LEGEND FOR BORELOG AND GRAIN SIZE DISTRIBUTION

PLASTIC SILTY CLAY

LOW PLASTIC CLAYEY SILT

NON PLASTIC SILT

SAND

ORGANIC

UNDISTURBED SAMPLE

DISTURBED SAMPLE

SHALE

N- BLOWS DELIVERED PER FOOT BY A 140 LB HAMMER FALLING 30 INCHES

MAX^{m} PENETRATION= 50 BLOWS

AFTER 50 BLOWS PENETRATION DEPTH WERE MEASURED