| A2 | PROSOIL | BOREHOLE NO: BH-1 | |
|---|---|---|---|
| | | LOCATION: Mokam Bari, Tamabil, 2 No Jaintapur, Jaintapur, Sylhet. | |
| PROJECT : Telecommunication Tower. | | DEPTH OF BORING: 21.0m | R. L.: On Road Level. |
| CLIENT : Grameenphone Ltd. | | DATE OF BORING: 17-06-2012. | G. W. T : 0.56m below from E. G. L. |

| THICKNESS | SOIL STRATA | BORELOG | UNDISTURBED SAMPLE | DISTURBED SAMPLE | DEPTH (m) SPT VALUES ( BLOWS / 300mm ) | Grain Size Distribution, % Clay %, Silt %, Sand % | Remarks |
|---|---|---|---|---|---|---|---|
| 2.0m | Reddish Yellow 10YR (7/6), dense, Sand (with pebble), SM. | | | D-1, D-2, D-3, D-4, D-5, D-6, D-7, D-8 | 29, 38, 44, 47, 49, 50, 50, 50 | | This water table is a trap wate, due to very low permeability of very dense and compact silt the water can not seep away from the soil layer. Over Over Over |
| 7.45m | Yellowish Gray 10YR (7/6), very dense, Silt, ML. | | | | | | |
| | Boring was terminated due to very dense and compacted silt. | | | | | | |

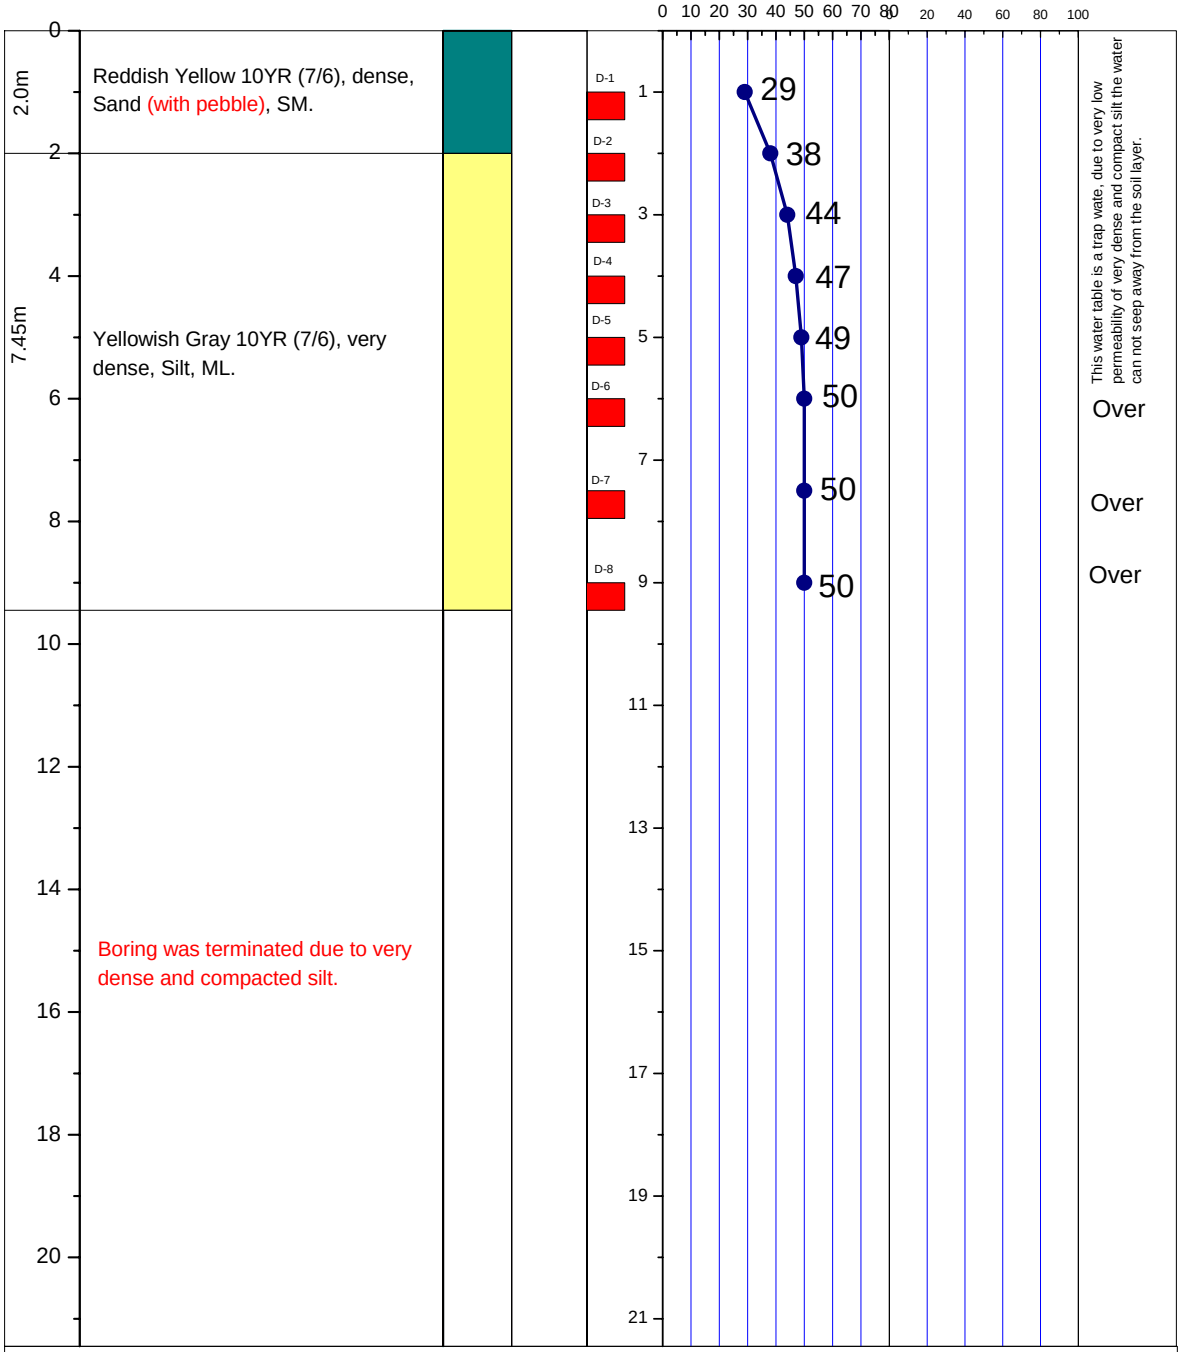


LEGEND FOR BORELOG AND GRAIN SIZE DISTRIBUTION (BASED ON 'ASTM CLASSIFICATION D-2487')

- PLASTIC CLAY
- SHALE
- SILT
- SAND
- PEAT/HIGHLY ORGANIC SOIL
- MICACEOUS FINE SAND/SILT
- UNDISTURBED SAMPLE
- DISTURBED SAMPLE

N- BLOWS DELIVERED PER FOOT BY A 140 LB HAMMER FALLING 30 INCHES

MAX$^{m}$ PENETRATION= 50 BLOWS

AFTER 50 BLOWS PENETRATION DEPTH WERE MEASURED