A2	PROSOIL	BOREHOLE NO: BH-1	
		LOCATION : Hasherdighi (Ali Kadom Road), Fashiakandi, Chakoria, Cox's Bazar.	
PROJECT : Telecommunication Tower.		DEPTH OF BORING : 9.0m	R. L.: 1.22m below from Road Level.
CLIENT : Warid Telecom International Ltd.		DATE OF BORING: 05-05-2011.	G. W. T : 0.15m above from E.G.L.

THICKNESS	SOIL STRATA	BORELOG	UNDISTURBED SAMPLE	DISTURBED SAMPLE	DEPTH (m) SPT VALUES (BLOWS / 300mm)	Grain Size Distribution, % Clay %, Silt %, Sand %	Max^{m} Penetration
4.5m	Gray 10YR (6/1), medium plasticity, very soft to very stiff, silty Clay, CL.		UD-1, UD-2	D-1, D-2	3, 2		
1.5m	Light Gray 10YR (7/1), dense to very dense, silty Sand, SM.			D-3, D-4	18, 40		
3.0m	Brown 7.5YR (5/3), very dense, fine Sand, SM.			D-5	50		Over
0.45m	Gray 10YR (6/1), very hard and compact, silty Shale, CL.			D-6	50		Over
12.0m	Boring was not possible due to very hard and compact silty Shale.						

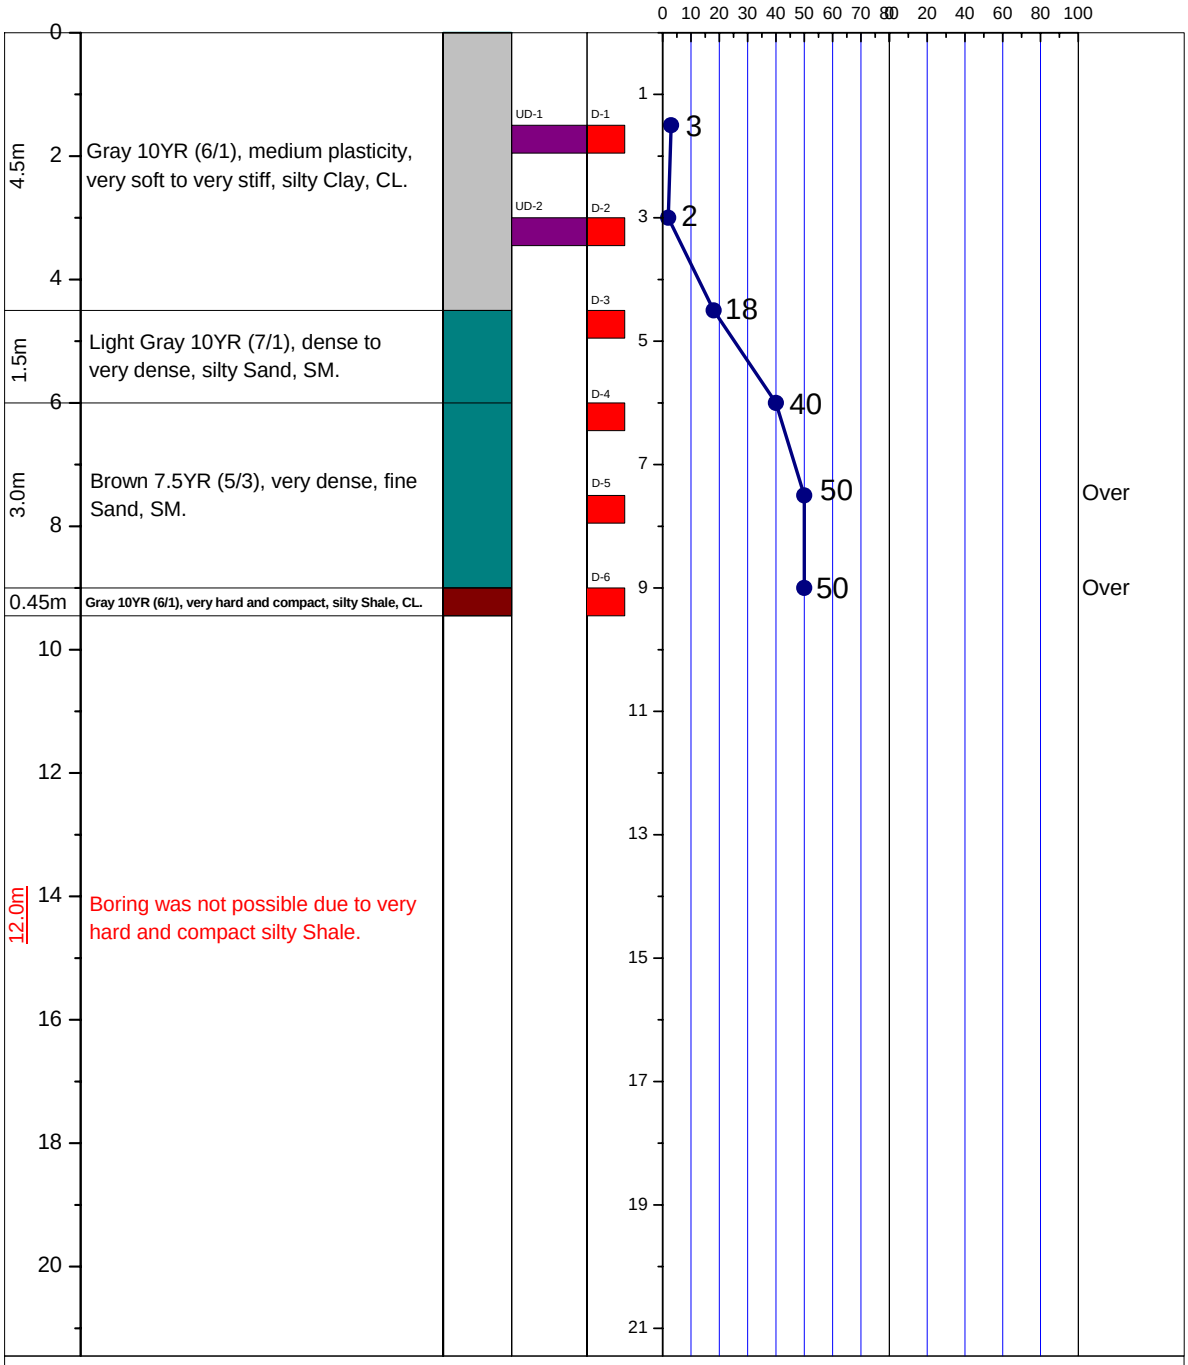

LEGEND FOR BORELOG AND GRAIN SIZE DISTRIBUTION (BASED ON 'ASTM CLASSIFICATION D-2487')

PLASTIC CLAY	SAND	SHALE	UNDISTURBED SAMPLE
MICACEOUS FINE SAND/SILT	SILT	PEAT/HIGHLY ORGANIC SOIL	DISTURBED SAMPLE

N- BLOWS DELIVERED PER FOOT BY A 140 LB HAMMER FALLING 30 INCHES

MAX^{m} PENETRATION= 50 BLOWS

AFTER 50 BLOWS PENETRATION DEPTH WERE MEASURED